



RIVER

FLOORPAN
'Laminate Flooring'

Brochure 2024



**Water Resistant
Laminate Flooring**





Healthy Living Spaces with the Laminate Flooring Collections Having Hygiene+ Feature

To live a healthy life, It is extremely important to have living spaces that are clean and free from bacteria. Manufactured with advanced technology, all the products in our laminate flooring collections with Hygiene+ feature leave no space for bacteria to reproduce. Bacteria and microbe can be transferred to the flooring via shoes, spilled liquids, pets and other sources. However, the Hygiene+ feature does not allow bacteria and the microbes to reproduce. Both you and your loved ones' health are protected.

The results of tests conducted on our laminate flooring collections with Hygiene+ feature have proved that the bacterial activity expected to be seen is blocked up to 99.9% within 24 hours.

(Tested according to ISO 22196)



Worlds First Eco Label “Blue Angel” Belongs to Floorpan for the First Time in Turkey

“The Blue Angel” is a certificate stating that laminate flooring products do not contain any chemicals that could be hazardous to health or environment.



Water Resistant Laminate Flooring

Floorpan **River** series provide superior durability and protection against water and moisture for **72 hours**.

Our products are manufactured in compliance with the NALFA Surface Swell Test and ISO 4760 standards.





Superior performance against water and moisture...
A plain, simple and stylish look.
The ideal solution for all your living spaces... **RIVER**




RIVER





FRV001 DANUBE OAK (OTN)

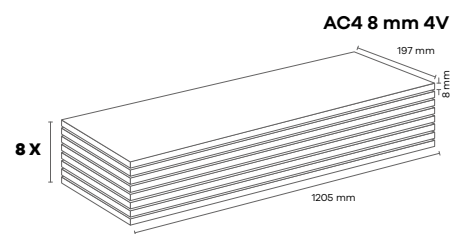

Panel / Package: 8 Pieces
Package: 1,899 m² ~14 kg





FRV002 TIGRIS OAK (OTN)

15 YEARS
DOMESTIC USE
GUARANTEE

AC4

15 YEARS
COMMERCIAL USE
GUARANTEE

EN 13329 A+C

Hygiene

+

72

Water Resistant
Laminate Flooring

PATENTED
LOCKING
TECHNOLOGY

L2C

UNICLIC

BLUE ANGEL

www.blauwengel.de

V4


CE


A+

CE

ISO 9001

Produced in the facilities where
ISO 9001 Quality Management
System is applied

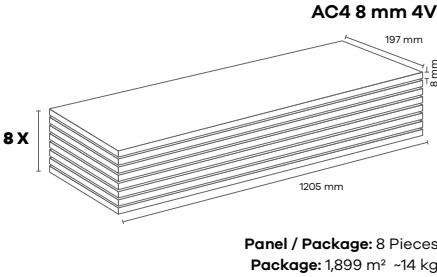

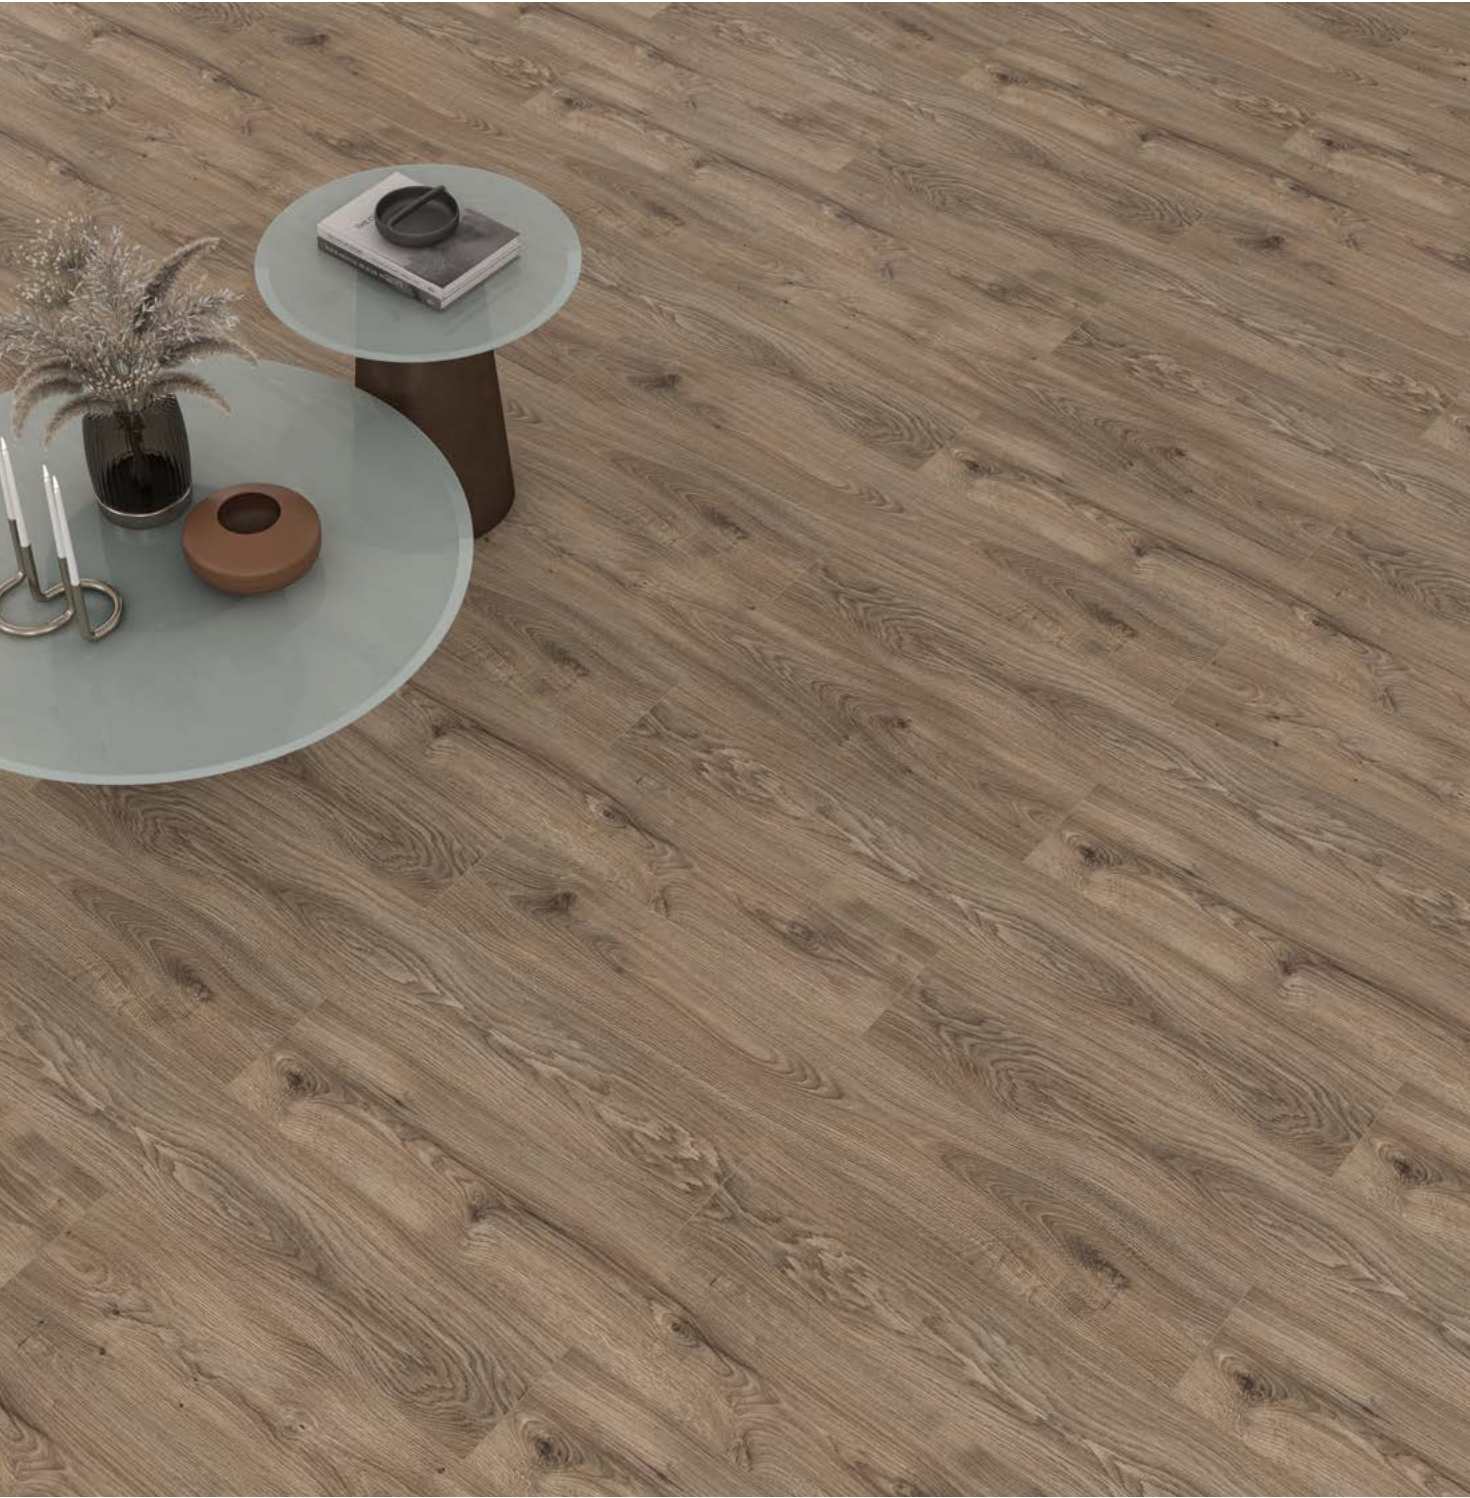

FRV003 DELAWARE OAK (OTN)

15 YEARS
DOMESTIC USE
GUARANTEE

AC4

15 YEARS
COMMERCIAL USE
GUARANTEE

EN 13329 A+C

Hygiene

Water Resistant
Laminate Flooring

L2C
TECHNOLOGIES


UNICLIC

Blue Angel

V4


A+
ATBC

ISO 9001

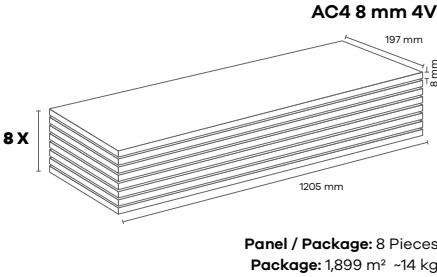




FRV004 GANGES OAK (OTN)

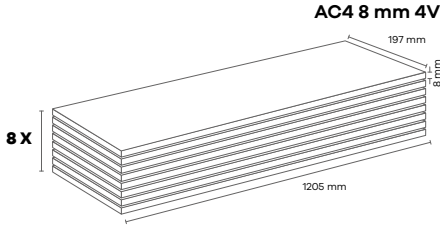

Panel / Package: 8 Pieces
Package: 1,899 m² ~14 kg



FRV005 THAMES OAK (OTN)

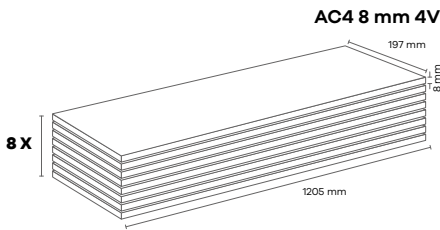


Panel / Package: 8 Pieces
Package: 1,899 m² ~14 kg






FRV006 NILE OAK (OTN)

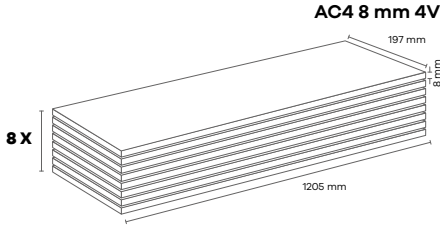

Panel / Package: 8 Pieces
Package: 1,899 m² ~14 kg



FRV007 TRENT OAK (OTN)

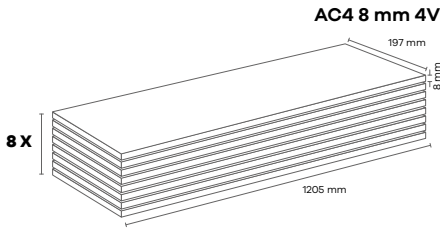

Panel / Package: 8 Pieces
Package: 1,899 m² ~14 kg



FRV008 ERNE OAK (OTN)

15 YEARS
DOMESTIC USE
GUARANTEE

AC4

15 YEARS
COMMERCIAL USE
GUARANTEE

EN 13329 A2

Hygiene

72

Water Resistant
Laminate Flooring

PATENTED
L2C
TECHNOLOGY

UNICLIC

SMART LOCKING

BLUE ANGEL

THE GERMAN STANDARD


V4

FORMALIN FREE (MFC) < 0.05%

A+
ATBC


Produced in the facilities where
ISO 9001 Quality Management
System is applied

ISO 9001

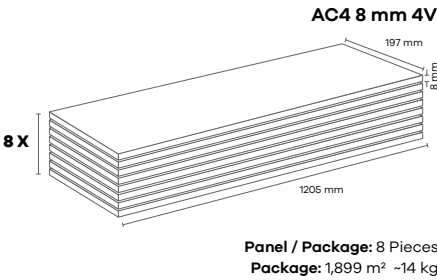


FLOORPAN


The Advantages of Laminate Flooring




FAST AND EASY ASSEMBLY




RESISTANT TO UV RAYS




EASILY CLEANED AND MAINTAINED, HYGIENIC




RESISTANT TO POINT STRIKES




RESISTANT TO CIGARETTE FIRE




BASE PANEL, HIGH DENSITY FIBERBOARD




RESISTANCE TO ABRASION CAUSED BY FURNITURE LEG




RESISTANCE TO ABRASION CAUSED BY CASTOR CHAIR




E0 FORMALDEHYDE EMISSION




NOT AFFECTED BY STAINS



ENVIRONMENTALLY FRIENDLY



RESISTANT TO SCRATCH



SUITABLE FOR UNDERFLOOR HEATING



01 - OVERLAY
HIGH QUALITY SURFACE PROTECTION RESISTANT TO WEAR AND SCRATCH

02 - DECOR PAPER
REFLECTING THE CHARACTERISTICS OF THE PRODUCT WITH A UNIQUE DESIGN

03 - HDF
STRONG BASE PANEL, RESISTANT TO HIGH PRESSURE PRODUCED AS PER E1 NORM

04 - BALANCE PAPER
PROTECTS AGAINST HUMIDITY AND DISTORTION

Laminate Flooring Classification

CLASS	21	22	23	31	32	33	34
UTILIZATION	AC1	AC2	AC3		AC4	AC5	AC6
ABRASION RESISTANCE	≥ 500	≥ 1000	≥ 2000		≥ 4000	≥ 6000	≥ 8500
RESISTANCE TO STAINS	Min. 4 (group 1 and 2) Min. 3 (group 3)		Min. 5 (group 1 and 2) Min. 4 (group 3)		Min. 5 (group 1, 2, 3)		

bridging **nature and life**